


Fixed Temperature Thermostat TSR-Series

Rainbow

Ver 1.0

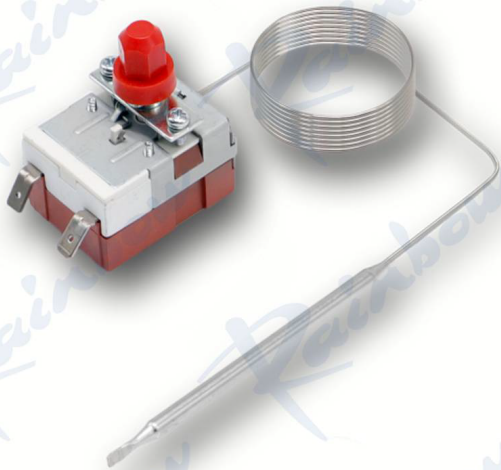

■ Key Features


- Manual Reset Type
- Power is cut off when a specific temperature is reached, requiring a manual restart
- Used to prevent secondary overheating of electronic devices using temperature control devices
- UL, CE, TUV, KC, RoHS Certification / Compliance with REACH
- Used in various applications
 - Commercial Cooking Equipments
 - Heating & Cooling Equipments
 - Industrial & Laboratory Facilities

■ Specification



Model	Temp Range	Ratings	Bulb Dimension	Switch Action	Accuracy	Specification
TSR-050SF	50°C Fixed	20A/250V	Ø5.8 X 121mm	SPST	±5°C	Temp Range : Max. 350°C (662°F) Bulb Material : Stainless Steel Capillary Tube : 1,000mm (250~2,000mm) Assembly Type : Ø8 HOLE Assembly Plug : PT1/4", M12, M14
TSR-085SF	85°C Fixed	20A/250V	Ø5.0 X 106mm	SPST	±6°C	
TSR-120SF	120°C Fixed	20A/250V	Ø5.0 X 102mm	SPST	±8°C	
TSR-210SF	210°C Fixed	20A/250V	Ø5.0 X 67mm	SPST	±10°C	
TSR-350SF	350°C Fixed	20A/250V	Ø5.0 X 60mm	SPST	±10°C	

■ Drawing

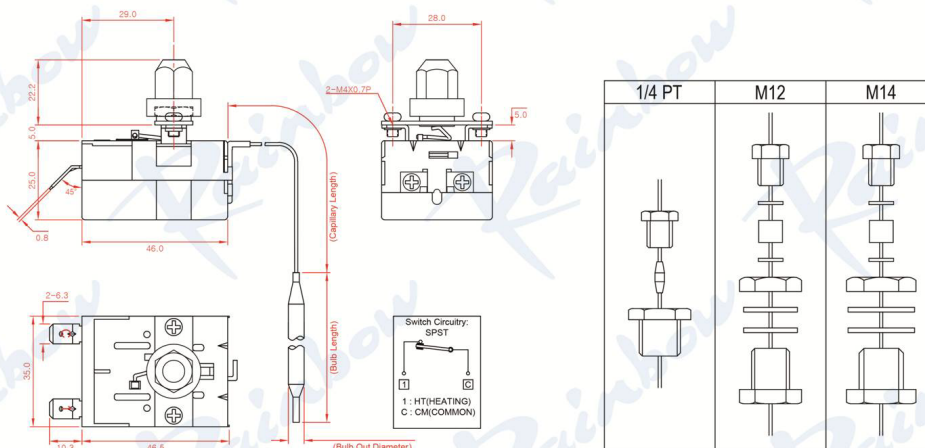

Rainbow

HEAD OFFICE & FACTORY
(주)레인보 / RAINBOW ELECTRONICS CO.,LTD.
303-204, 397, Seokcheon-ro, Bucheon-si, KOREA
TEL : 82-32-624-2288 / FAX : 82-32-624-2299

CHINA OFFICE & FACTORY
青岛来仁宝电子有限公司 / QINGDAO RAINBOW
18, Huanghe Road, Laixi, Qingdao, CHINA
TEL : 86-0532-8849-3930 / FAX : 86-0532-8849-3932